Macerators
Versacut
for free-standing or wall-mounted toilet

Features:

- optimised high-performance cutting system made of corrosion-resistant special steel 1.4112 with particular high hardness, wear resistance and cutting performance
- tank made of ABS for direct connection to a free-standing toilet with minimum inlet height
- tank ventilation via activate carbon filter; optional ventilation via DN 40 pipe
- robust, wet-installed pump
- integrated alarm signal in case of malfunction
- pressure outlet 11/4" FPT with integrated non-return valve on top; outlet horizontal or vertical (90° bend)
- max. medium temperature 40°C - short-term max. 60°C
- protection grade IP 68 - fully submersible



Application:

- single toilet lifting unit for limited use according to DIN EN 12050-3
- in private areas below the backflow level, e.g. basements or refurbishments
- connection of one free-standing or wall-mounted toilet, sink, shower and bidet

Scope of delivery:

- plug-and-play with 1.5 m power cable and safety plug
- accessories: buoyancy protection, inlet nozzle DN 40, outlet connection 11/4" MPT/FPT, Ø32 and Ø40 connection
- small parts and fastening materials


Product benefits:

- connection of one free-standing or wall-mounted toilet
- high-performance cutting system (cuts wet wipes and sanitary products)
- two lateral inlets with non-return flap
- 2 additional inlets at the tank cover (optionally selectable at 3 positions)
- freely selectable air vent position on the top
- very low inlet height (50 mm, lateral), e.g. for showers
- IP 68 - fully submersible
- potential-free contact with easy outside access

Technical data:

Art.no.	U [V]	P_1 [W]	P_2 [W]	In [A]	n [min-1]	Qmax [m³/h]	Hmax [m]	PO	Onmin [mm]	OFFmin [mm]	L [mm]	W [mm]	H [mm]	Weight [kg]
24005	230	500	370	2,3	2950	7,0	7,0	variabel 1 1/4"MPT, 1 1/4" FPT, D28, D32	100	50	435	178	290	10,04

Characteristics:

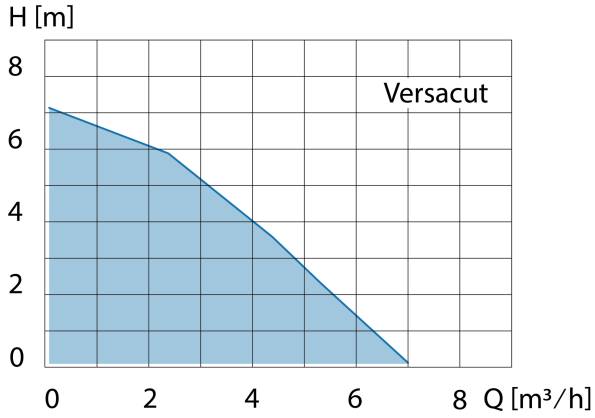


Materials:

Material impeller:	PP GF30
Seal motor:	Mechanical seal & shaft seal Carbon/ceramic/NBR
Material motor housing:	Stainless steel 1.4404
Material pump housing:	PP GF30
Material container:	ABS

Zehnder Pumpen GmbH · Zwönitzer Str. 19 · 08344 Grünhain-Beierfeld · Phone: +49 37 74 / 52 - 100 · Telefax: +49 37 74 / 52 - 150 · e-mail: info@zehnder-pumpen.de

Example of installation:

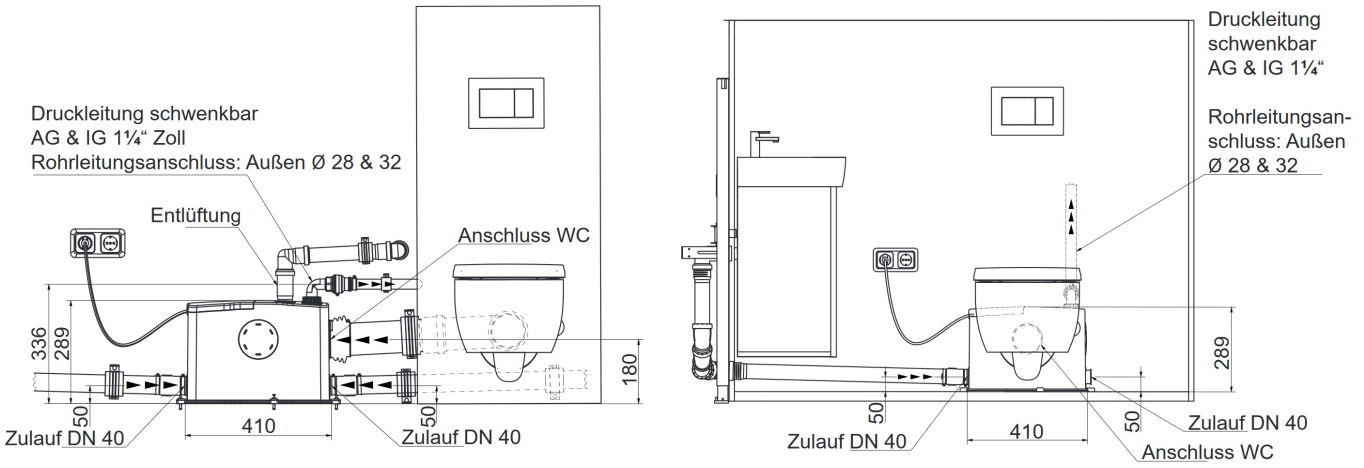

Dimensions:

