

BADU[®] Magic II

The ideal introductory pump with many connection variations.
Tried and tested in small to medium-size filter units.

Field of application

Swimming pool water circulation through a filter system.
The pump can be installed max. 2 m above or max. 3 m below water level.

Design

Monoblock-type pump with integrated strainer tank.
The bellows-type mechanical seal is mounted on a plastic shaft protector sleeve.
Motor/pump has no contact with the pool water providing complete electrical separation.
Strainer tank capacity approx. 0.5 l
Strainer basket mesh size approx. 2.8 x 2.8 mm

Materials used

Pump casing PP
Housing cover PP TV 40
Impeller PPE GF 30
Strainer basket PP
Lid PC, transparent/ABS
Glue socket ABS
Mechanical seal carbon/ceramic/NBR
Screws stainless steel
Elastomers NBR

Technical data at 50 Hz	BADU Magic	II/4	II/6	II/8	II/11
Inlet Sa/outlet connection Da	Special union with glue socket d = 50 or hose adapter for 1¼" and/or 1½" hose is included.				
Rec. inlet/outlet pipe, PVC pipe, d ³⁾		50/40	50/40	50/50	50/50
Rec. inlet/outlet pipe, hose, d ³⁾		1½"/1¼"	1½"/1¼"	1½"/1½"	1½"/1½"
Power input P ₁ /output P ₂ ¹⁾ (kW)	1~ 230 V	0.35/0.18	0.45/0.25	0.61/0.40	0.72/0.45
Rated current (A)	1~ 230 V	1.95	2.30	2.70	3.20

For detailed technical data regarding motors/devices please see page 38.

Technical data may vary.


Article no	Description	Voltage	Power output P ₂
219.1048.038	BADU Magic II/4	1~ 230 V	0.18 kW
219.1068.038	BADU Magic II/6	1~ 230 V	0.25 kW
219.1088.038	BADU Magic II/8	1~ 230 V	0.40 kW
219.1118.038	BADU Magic II/11	1~ 230 V	0.45 kW




< Ready to plug in with 3.0 m cable



Characteristics

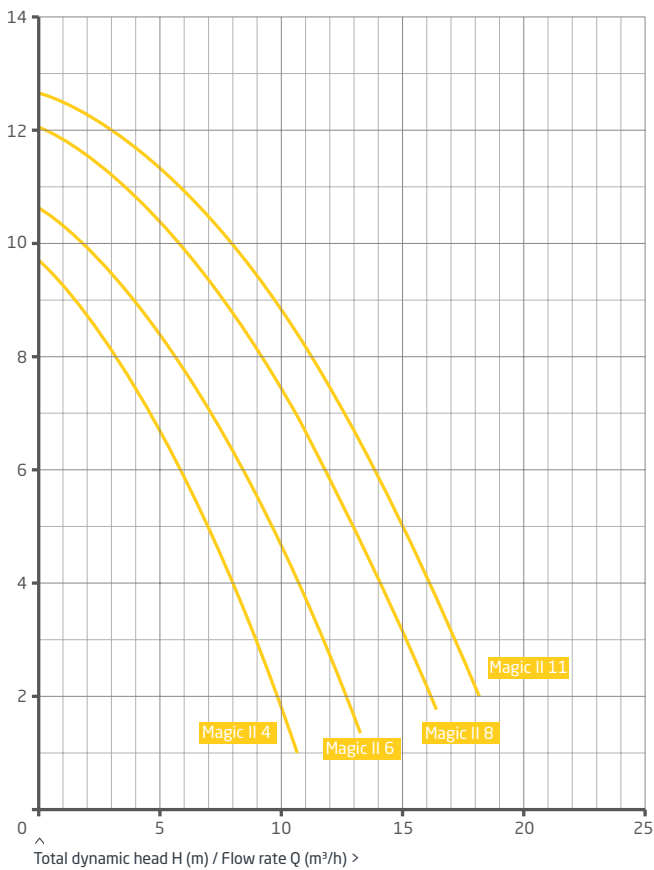

Dimensions

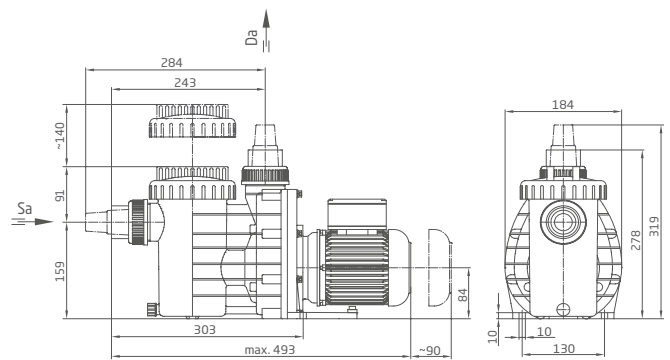

Detailed dimensions available on request or at badu.de